
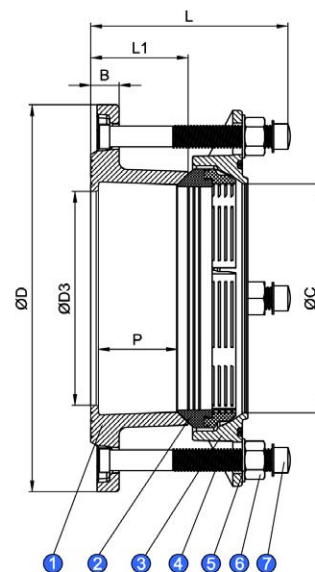


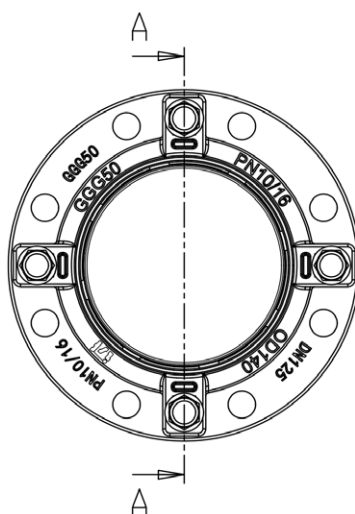

Generic Data

- **Body Material:** Ductile Iron GGG50 with FBE (Fusion Bonded Epoxy) Coating.
- **Working Pressure:** PN10/PN16.
- **Fastening System:** Equipped with A2-304 Stainless Steel bolts and nuts.
- **Sealing Options:** EPDM or NBR rubber seals.
- **Product Type:** High Tolerance Mechanical Pipe Fittings.

Materials

Nº	ITEM	MATERIAL	STANDARD
1	Body	Ductile Iron	GGG50
2	Sealing Ring	Rubber+Brass	EPDM+Brass
3	End Ring	Ductile Iron	GGG50
4	Bolts	Stainless Steel	A02 304
5	Washer	Stainless Steel	A02 304
6	Nut	Stainless Steel	A02 304 with Teflon Coated
7	Cap	Plastic	

Dimensions (mm)

Size	Pipe OD	D	D3	C	B	L	L1	P	Bolts		DIN EN
									Diap x L	Qty	
DN40	50	165	45	53	19	115	63	50	M12*115	2	•
DN50	63	180	55	66	19	130	63	50	M12*115	4	•
DN60/DN65	75	180	66	79	19	130	63	50	M12*115	4	•
DN80	90	200	84	93	19	130	63	50	M12*115	4	•
DN100	110	220	105	115	19	130	61	47	M12*115	4	•
DN100/DN125	125	250	110	127	19	130	63	50	M12*115	4	•
DN125	140	250	125	143	19	130	63	50	M14*125	4	•
DN150	160	285	154	164	19	140	63	50	M14*125	4	•
DN150	180	285	169	185	19	132	69	60	M14*140	4	•
DN200	200	340	210	204	19	140	70	55	M14*125	4	•
DN200	225	340	210	230	20	180	80	75	M16*160	4	•
DN250	250	400	250	255	22	180	88	75	M16*160	6	•
DN250	280	400	252	283	22	180	88	75	M16*160	6	•
DN300	315	455	302	318	24	180	88	70	M16*160	6	•