

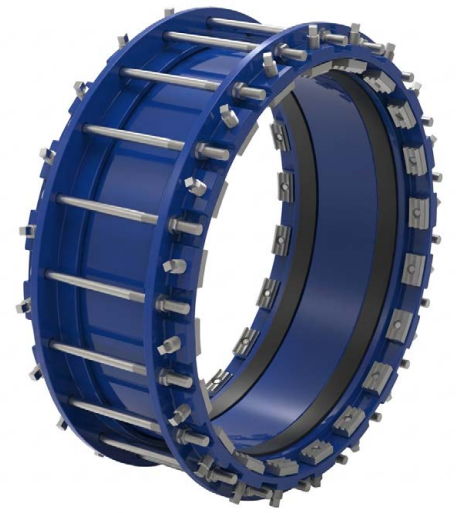


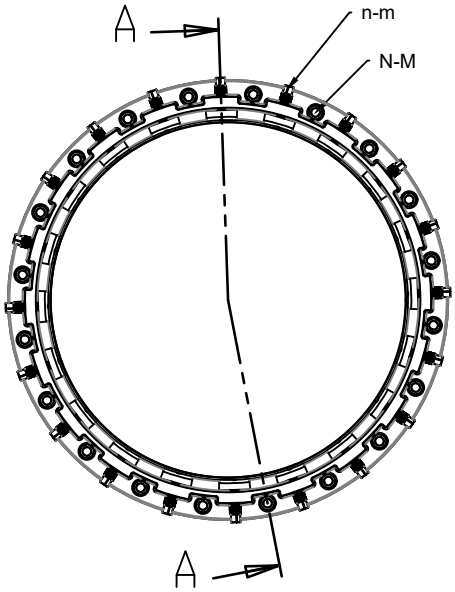

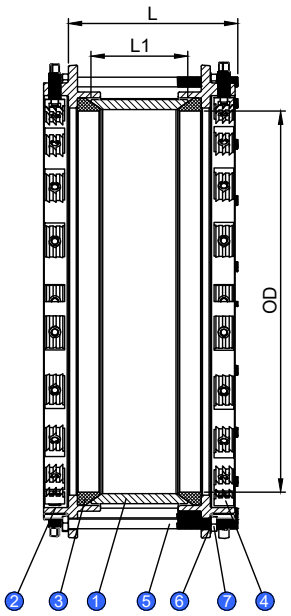

Generic Data

- **Body Material:** Ductile Iron GGG50 with FBE (Fusion Bonded Epoxy) Coating.
- **Working Pressure:** PN10/PN16.
- **Fastening System:** Equipped with A2-304 Stainless Steel bolts and nuts.
- **Sealing Options:** EPDM or NBR rubber seals.
- **Product Type:** High Tolerance Mechanical Pipe Fittings.

Materials

Nº	ITEM	MATERIAL	STANDARD
1	Body	Ductile Iron	GGG50
2	End Ring	Ductile Iron	GGG50
3	Rubber Seal	Rubber	EPDM
4	Grip Tooth	SS304	–
5	Bolt	Dacromet Coated Steel	ISO898-1:1999
6	Washer	Dacromet Coated Steel	–
7	Nut	Dacromet Coated Steel	ISO898-2:1992

Dimensions (mm)

External diameter of the pipe	L	L1	N-M	n-m
DN355	240	152	8-M16	8-M16
DN400	240	152	8-M16	16-M16
DN450	250	152	10-M16	20-M16
DN500	250	152	20-M16	20-M16
DN560	250	152	20-M16	20-M16
DN630	250	152	20-M16	20-M16
DN710	250	152	24-M16	24-M20
DN800	250	152	24-M16	24-M20
DN900	250	152	28-M16	28-M20
DN1000	250	152	28-M16	28-M20
DN1200	250	152	32-M16	32-M20